

# GYT Container

# GYT

## Description

20' General goods, side curtain container .



Overall Length	6058 mm	Tare	2700 kg
Overall width	2500 mm	Load	19300 kg
Overall height	2896 mm	Gross	22000 kg
Internal Length	5952 mm	Volume	38.9 m <sup>3</sup>
Internal width	2490 mm between posts		
Internal height	2626 mm		
Side opening width	5702 mm		
Side opening Height	2543 mm		

## Features:

Three (3) lashing rings welded to each top end rail and bottom end rail (total 12). Each lashing point is designed to provide a "1500 kg pull load in any direction" without any permanent deformation of lashing ring and surrounding area.

Three (3) lashing rings will be welded to each end wall (total 12). Each lashing point is designed to provide a "250 kg pull load in any direction" without any permanent deformation of lashing ring and surrounding area.

Each side of the bottom rail has a tie down rail. Also, suitably rated and supported to accommodate the typical 5T rated commercial load restraints, which means accommodating the 50mm hook and keeper these load restraint use.

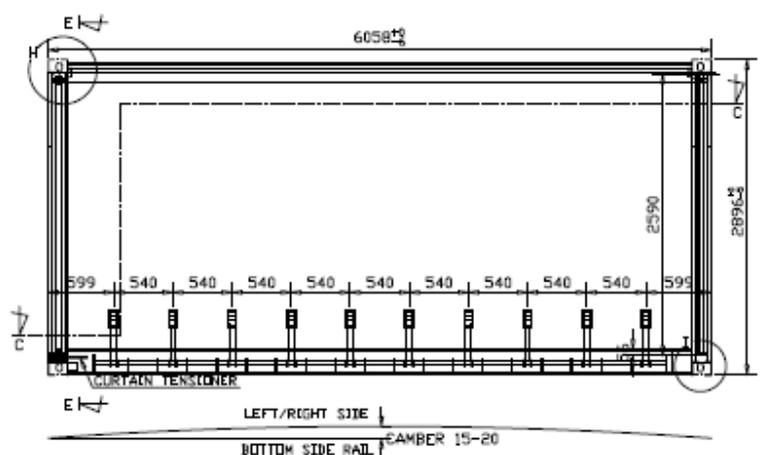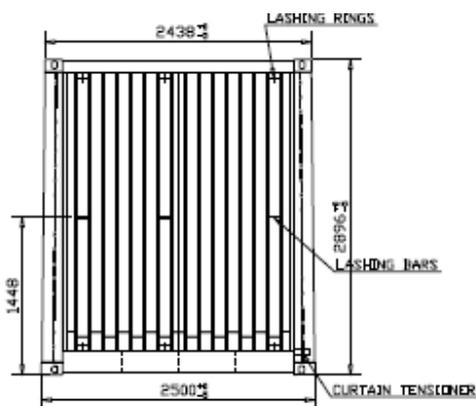

**Technical Data**

Diagram GYT  
General arrangement  
Clearance diagram  
Stencilling diagram

**Notes**

GYT19 – GYT1195  
Containers built by Yangzhou Runyang Logistic Equipment Co. LTD, 2019.